

NEW!



NP40

- PORTABLE POWER QUALITY ANALYZER

NP40 power quality analyzer is the professional portable device to measure and analyze the power system quality, supply the harmonics analysis and power quality data analysis, also provide big memory for the data storage, which is used to make the long term logger measuring to power system. The PC software can simply upload the data to PC for full analysis.

FEATURES

- 5,6" TFT color screen, 320 x 240 pixel.
- Waveform real-time display (4 voltages/4 currents).
- Half cycle RMS measurement (voltage and current).
- Measurement of TRMS currents up to 3000 A (with standard probes mode).
- Measurement in 1-phase and 3-phase systems (3 - and 4-wire).
- Measurement of voltage, current, harmonics, power, energy, inrush current, flicker and other.
- Graphical presentation of data in a waveform and vector diagram.
- Record of events: dips, swells, overvoltages.
- Power quality according to EN-50160 standard or user-defined limit.
- Internal memory for data logging needs (continuous registration from 2 hours to 7 days).
- The registration frequency from 1 second up to 60 minutes.
- Built-in 8G memory card.
- Ethernet interface for remote operation of the analyzer.
- USB Host to move archive data and screenshots to an external USB memory.
- Safety standards: EN 61010-1, CAT III 1000V / CAT IV 600V.
- The analyser set: analyzer, flexible probes mode 3000A (4x), voltage tests leads alligator clips (5x), DC power adapter, CD with software, user's manual.



MEASUREMENTS MODES



1 Scope

View the voltage/current waveform and readings. Cursor Zoom function.

Volts/Amps/Hertz

0:00:06

	L1	L2	L3	N
Urms	238.7	238.7	238.7	4.842
Upk	315.2	315.2	315.2	8.518
CF	1.32	1.32	1.32	1.76


	L1	L2	L3	N
Irms	43.60	6.335	6.346	0.814
Ipk	60.33	7.630	7.901	1.113
CF	1.38	1.20	1.25	1.37

Freq = 50.00 Hz 2015-03-09 22:18:53

PHASE WIRE TREND HOLD

2 Voltage/Current/Frequency

Measure voltage/current/frequency and crest factor.

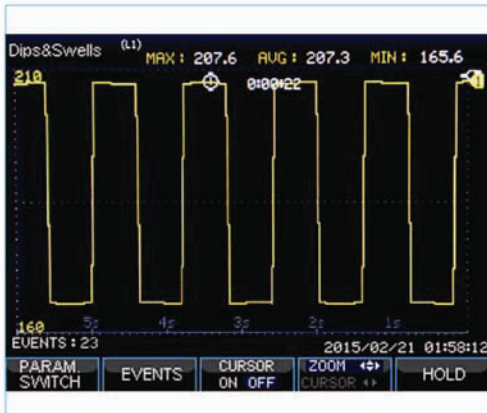

3 Dips & Swells

Capture the abnormal event, such as swells, dips, interruption and rapid voltage change.



4 Harmonics

Harmonics and interharmonics measurement up to the 50th, parameter DC component, THD, K-factor.

Power & Energy

0:01:32

	L1	L2	L3	Total
P(kW)	3.311	1.472	1.482	6.265
S(kVA)	10.39	1.501	1.500	13.39
Q(kVAR)	9.845	0.293	0.234	10.37
TPF	0.32	0.98	0.99	0.47
KWh	0.048	0.037	0.038	0.123
KVAh	0.262	0.038	0.038	0.338
KVARh	0.248	0.008	0.006	0.000

2015-03-09 22:23:23 0:01:32

CLOSE ENERGY TREND RESET ENERGY

5 Power and energy

Full power parameters measurement including Vrms/Arms/KW/KVA/KVAR/TPF/DPF and energy data KWh/kVAh/kVARh.

Flicker

0:00:08


	L1	L2	L3
Pst(1min)	0.00	0.00	0.00
Pst	0.00	0.00	0.00
Plt	0.00	0.00	0.00

2015-03-09 22:25:16

PF 5 HOLD

6 Flicker

Support measure the parameters Pst (<10 min), Plt (<2 hrs), also Pst (1 min) for quick feedback and instant flicker pinst in trend.

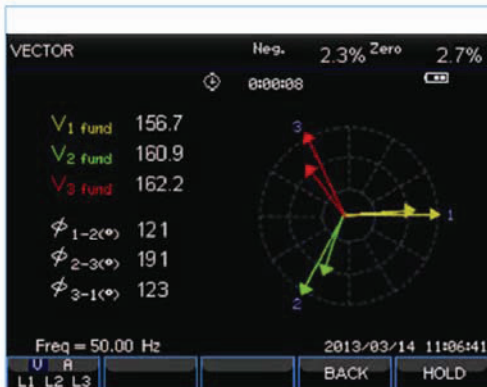

7 Unbalance

Check the unbalance in 3 phases based on EN 61000-4-30 standard.



8 Transients

Capture waveform at high-resolution during a variety of disturbances, maximum 100 events, sample rate 20Ks/s.

MEASUREMENTS MODES



9 Inrush current

Capture the surge currents that occur in a large or low-impedance load comes on line.

10 Logger

Record the measuring data as selectable parameters and interval, duration. The saved data in TF card, which can be downloaded to PC by USB and check by Power View software.




11 Monitor

Measure all the parameter Vrms, Arms, harmonics, flicker, dip, swell, rapid voltage change, interruption, unbalance, frequency at the same time, check whether meet the requirements limited by users or default standards EN50160. The monitoring time lasts from 2 hours to 7 days.


LUMEL POWER ANALYZER SOFTWARE

LUMEL Power Analyser is easy operation software to make the remote control to analyzer and view the download data.


AUTO Scan the device connected to PC through LAN interface

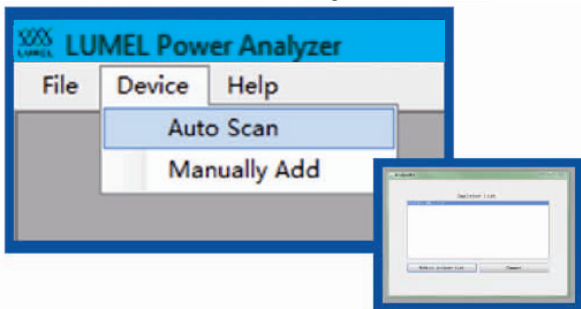


Remote control interface

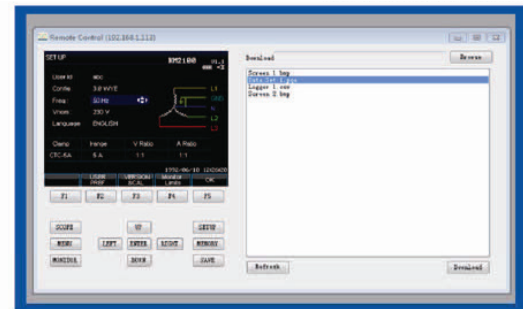


Monitor the user-demanded parameters

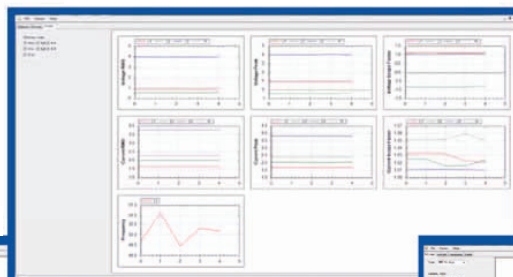

Visual view of data trend (max, min, average)

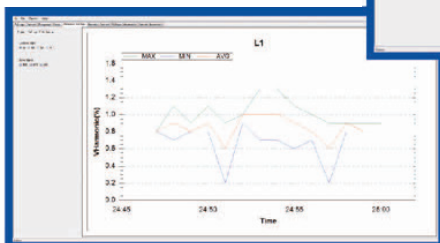

Visual view of data trend (max, min, average)

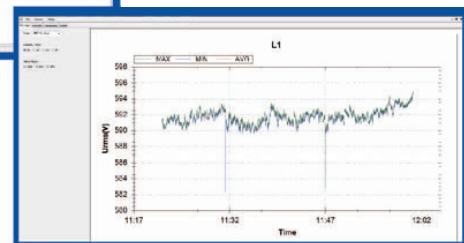

TECHNICAL DATA

▶ INPUTS

VOLTAGE INPUTS

Input Channels	4 (3-phase + neutral)
Max. input voltage	1000 Vrms
Range of nominal voltage	50...500V
Max pulse peak voltage	6kV
Bandwidth	>3kHz
Input impedance	4MΩ/5pF

CURRENT INPUT

Number of input	4 (3-phase+ neutral) DC coupling
Type	clamp current sensor with mV output
Input range	1...3000 Arms with supplied current clamp
Input Impedance	50 kΩ
Bandwidth	>3kHz

SAMPLING SYSTEM

Resolution	8 channels 16 bits AD
Sampling rate	20kS/s for each channel, 8 channels sample synchronously
RMS sampling	5000 points for 10/12 cycles (according to EN 61000-4-30)
PLL synchronizacja	4096 points for 10/12 cycles (according to EN 61000-4-7)

▶ MEASUREMENT

	Measurement range	Resolution	Accuracy
VOLTAGE/CURRENT/FREQUENCY			
Vrms (AC+DC)	1 ~ 1000Vrms	0.1Vrms	± 0.5% of nominal voltage
Vpk	1 ~ 1400Vpk	0.1Vpk	± 0.5% of nominal voltage
V (crest factor)	1.0 ~ >2.8	0.01	± 5%
Arms (AC)	1~ 1000A/3000A/5000A	1A	± 1% ± 2A
	1~ 100A	0.1A	± 1% ± 0.2A
Apk	1 ~ 4000Apk	1A	± 1% ± 2A
A (crest factor)	1 ~ 10	0.01	± 5%
Frequency	42.5 ~ 57.5Hz (50Hz nominal)	0.01Hz	± 0.01Hz
	51 ~ 69Hz (60Hz nominal)	0.01Hz	± 0.01Hz

DIPS & SWELLS

Vrms1/2	0 ~ 200% of nominal voltage	0.1Vrms	± 1%
Arms1/2	1 ~ 3000A	1A	± 1% ± 2A
Threshold levels	Threshold is settable according to nominal voltage percentage. Detectable events type: dips, swells, interruption, voltage rapid change.		
Duration	hour-minute-second-microsecond	0.5 period	1 period

► MEASUREMENT

	Measurement range	Resolution	Accuracy
HARMONIC			
Harmonic number	1 ~ 50		
Inter-harmonic	1 ~ 49		
Harmonic voltage	0.0 ~ 100.0%	0.1%	±0.1% ± nx0.1%
Harmonic current	0.0 ~ 100.0%	0.1%	±0.1% ± nx0.1%
THD	0.0 ~ 100.0%	0.1%	±2.5%
DC Relative	0.0 ~ 100.0%	0.1%	±0.2%
Frequency	0 ~ 3500Hz	1Hz	1Hz
Phase	-360° ~ 0°	1°	± nx1.5°
POWER & ENERGY			
Active/apparent/reactive power	1.0 ~ 20.00MW	0.1kW	± 1.5 ±10 digits
Energy	0.00kWh ~ 200GWh	10Wh	± 1.5 ±10 digits
Power factor PF	0 ~ 1	0.01	± 0.03
FLICKER			
Pst (1min), Pst, Plt, PF5	0.00 ~ 20.00	0.01	±5%
UNBALANCE			
Voltage	0.0 ~ 5.0%	0.1%	± 0.5%
Current	0.0 ~ 20.0%	0.1%	± 1%
Voltage phase	-360° ~ 0°	1°	± 2 digits
Current phase	-360° ~ 0°	1°	± 5 digits
VOLTAGE TRANSIENT			
Vpk	±6000 Vpk	1V	±15%
Vrms	10 ~ 1000Vrms	1V	±2.5%
Min. Test Time	50us		
Sampling rate	20ks/s		
INRUSH CURRENT			
Arms (AC+DC)	0~3000 Arms	0,1	±1% ± 5 digits
Inrush duration	6s ~ 32min selectable	10 ms	±20 ms
LOGGER			
Recording	user-definded parameters for 4 phases at the same time		
Memory	data stored in TF card, 8GB		
Duration time	2 hrs to 1 year		
Interval	1s to 1 hr		

► GENERAL CHARACTERISTICS

DISPLAY	
Screen	color TFT LCD
Size	5,6 inch
Resolution	320×240
Brigthness	adjustable
HOUSING	
Protection	protection shield, strong
IP	IP51, acc. to EN 60529
INTERFACE	
USB Host	Download file to PC by UK disk for analyze with PC software.
LAN	For remote control of the analyzer and measurement data transmission.
MEMORY	
FLASH memory	128MB
Tf card	8GB
MECHANICAL	
Dimension	262× 173 × 66mm
Weight	1.6 kg
ENVIROMENT	
Working temperature	0°C~ 40°C
Storage temperature	-20°C~ 60°C
Humidity	90% relative humidity
POWER	
Adapter input	90~264V
Adapter output	9V 2.2A
Battery	rechargeable lithiumion 7.4V 4.4Ah
Battery working time	> 7 hours
Battery charge time	4 hours
STANDARD	
Measurement method	EN 61000-4-30 Class-S
Measurement performance	EN 1000-4-30 Class-S
Power quality monitoring	EN 50160
Flicker	EN 61000-4-15
Harmonic	EN 61000-4-7
ELECTRICAL SAFETY	
Comply with	EN 61010-1
Max. voltage at voltage input	600V CAT IV, 1000V CAT III
Max. voltage at current input	30V

► ANALYZER SET

Voltage tests leads alligator clips	length 2m, 5 pcs
Power adapter DC	1 pc
Power patch cord	1 pc
Soft carry bag	1 pc
Hang strap	1 pc
CD wit software, user's manual	1 pc each
flexible probes mode	3000A, 4 pcs

► FLEXIBLE PROBES MODE

Primary current rating	3000 A
Output voltage ratio	50 mV/ 1000 A
Measurement range	20 A ~ 3000 A
Accuracy	± 1% + position error
Maximum allowable input	100 KA
Phase error	< ± 1°
Noise	< 2 mVrms (10 Hz ~ 10 KHz)
Frequency characteristic	10 Hz ~ 10 KHz (-3dB)
Weight	130 g
Length	200 cm
Min. bending radius	60 mm
Measurement position error	± 2%

ORDERING CODE

Table 1. NP40 ordering code:

Portable power quality analyzer NP40 -	XX	X	X
Version:			
standard	00		
custom-made*	XX		
Language:			
Polish		P	
English		E	
other*		X	
Acceptance tests:			
without extra requirements			0
with an extra quality inspection certificate			1
acc. to customer's request*			X

* after agreeing with the manufacturer

